

PRODUCT ANNOUNCEMENT

1 PLY URETHANE SELECTIONS

Item # 100100
U85/1E G Amber
T04 Amber

Item # 100107
U85/1E G Dark Green
T04 Dark Green Gloss

Item # 100120
U85/1E G White
T04 U Gloss White

Item # 100121
U85/1E M White
T04 U Matt White

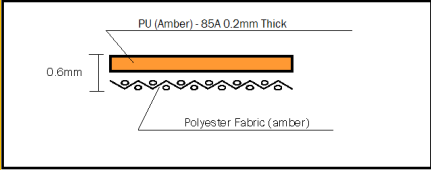
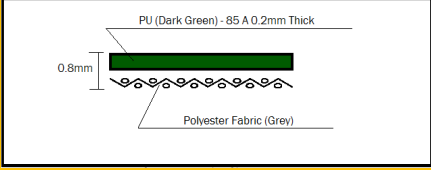
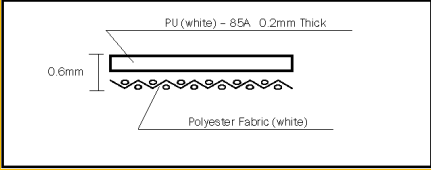
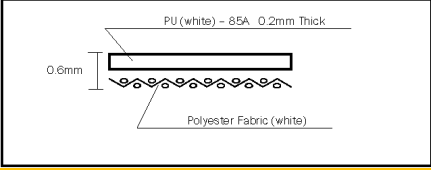
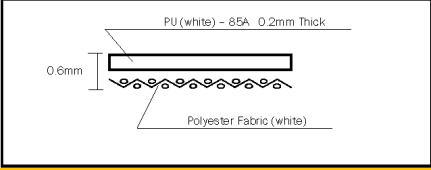
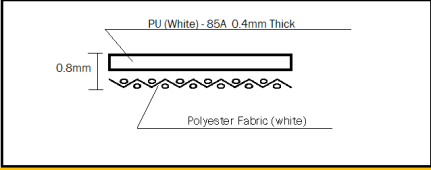
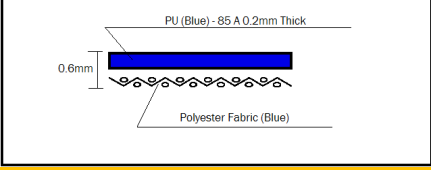
Item # 100122
U85/1E-AS M White
T04 U AS Matt White

Item # 100123
U85-EX/1E M White
T04 XH Matt White

Item # 100124
U85/1E MATT Blue AM PLUS
T04 Matt Blue
AM Plus

Item # 120105
U85/1E Amber HARQ
T04 Amber Emboss
(Harlequin)

For additional information or a quote please contact customer service at
customers@ubelting.com or call 800-928-9995

<p>Item Description: (100100) U85/1E G Amber</p> <p>Thickness: 0.6 mm - 0.023 Inch</p> <p>Minimum Pulley Dia.: 4 mm - 0.16 Inch</p> <p>Strength: 4 daN/cm - 23 lbs/Inch</p> <p>Operating Temp.: -22° to +212° F</p> <p>Cover description: Polyurethane (Gloss)</p>	
<p>Item Description: (100107) U85/1E G DK Green</p> <p>Thickness: 0.8 mm - 0.031 Inch</p> <p>Minimum Pulley Dia.: 6 mm - 0.23 Inch</p> <p>Strength: 4 daN/cm - 23 lbs/Inch</p> <p>Operating Temp.: -22° to +212° F</p> <p>Cover description: Polyurethane (Gloss)</p>	
<p>Item Description: (100120) U85/1E G White</p> <p>Thickness: 0.6 mm - 0.023 Inch</p> <p>Minimum Pulley Dia.: 4 mm - 0.16 Inch</p> <p>Strength: 3 daN/cm - 17 lbs/Inch</p> <p>Operating Temp.: -22° to +176° F</p> <p>Cover description: Polyurethane (Gloss)</p>	
<p>Item Description: (100121) U85/1E M White</p> <p>Thickness: 0.6 mm - 0.023 Inch</p> <p>Minimum Pulley Dia.: 4 mm - 0.16 Inch</p> <p>Strength: 3 daN/cm - 17 lbs/Inch</p> <p>Operating Temp.: -22° to +176° F</p> <p>Cover description: Polyurethane (Matt)</p>	
<p>Item Description: (100122) U85/1E-AS M White</p> <p>Thickness: 0.6 mm - 0.023 Inch</p> <p>Minimum Pulley Dia.: 4 mm - 0.16 Inch</p> <p>Strength: 4 daN/cm - 23 lbs/Inch</p> <p>Operating Temp.: -22° to +176° F</p> <p>Cover description: Polyurethane (Matt)</p>	
<p>Item Description: (100123) U85-EX/1E M White</p> <p>Thickness: 0.8 mm - 0.031 Inch</p> <p>Minimum Pulley Dia.: 8 mm - 0.31 Inch</p> <p>Strength: 4 daN/cm - 23 lbs/Inch</p> <p>Operating Temp.: -22° to +176° F</p> <p>Cover description: Polyurethane (Heavy Matt)</p>	
<p>Item Description: (100124) U85/1E M Blue AM Plus</p> <p>Thickness: 0.6 mm - 0.023 Inch</p> <p>Minimum Pulley Dia.: 4 mm - 0.16 Inch</p> <p>Strength: 4 daN/cm - 23 lbs/Inch</p> <p>Operating Temp.: -22° to +212° F</p> <p>Cover description: Polyurethane (Matt Anti-Microbial)</p>	
<p>Item Description: (120105) U85/1E Amber Harlequin</p> <p>Thickness: 0.7 mm - 0.028 Inch</p> <p>Minimum Pulley Dia.: 8 mm - 0.31 Inch</p> <p>Strength: 4 daN/cm - 23 lbs/Inch</p> <p>Operating Temp.: -4° to +212° F</p> <p>Cover description: Polyurethane (Gloss Diamond Emboss)</p>	