

PRODUCT ANNOUNCEMENT

Big Bear

Features

- * 95A Solid Urethane Blue and Beige
- * FDA and USDA approved
- * Manufactured without Fabric
- * Available smooth or negative Pyramid bottom
- * 100% non fraying
- * Highly sanitary

Benefits

- * Excellent release capabilities
- * Cut, Tear and abrasion resistant
- * 43" slab width
- * Ideal for Dry, Fatty and Wet Foods
- * Ideal for Cheese, Milk, Meat and Poultry
- * Finger spliceable (Not for Aeon50)



UNIVERSAL BELTING RESOURCE

"Working Through Distribution"

#2 Paisley Park
Carmichaels PA 15320
PH: 800-928-9995
FX: 724-966-2452


www.universalbelting.com
customers@ubelting.com



Material Specifications


Aeon 50 Blue PD #450310

Thickness: 3.00 mm - 0.118 Inch
 Minimum Pulley Dia.: 90 mm - 3.54 Inch
 Strength: 1.8 daN/cm - 10 lbs/Inch
 Operating Temp.: -4 to +140° F
 Belt description: Smooth x Positive Drive Ribs

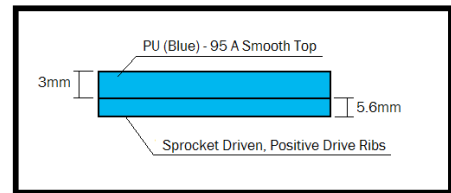


UU85/1 H M LT Blue #450451

Thickness: 2.50 mm - 0.098 Inch
 Minimum Pulley Dia.: 40 mm - 1.57 Inch
 Strength: 2 daN/cm - 11 lbs/Inch
 Operating Temp.: -22 to +212° F
 Belt description: Smooth x Negative Pyramid W/ Cords

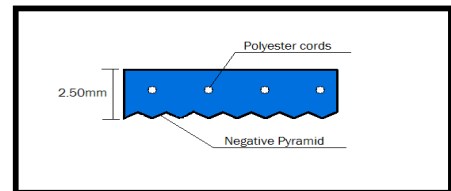


3mm PU BB Beige SxE #450132

Thickness: 3.00 mm - 0.118 Inch
 Minimum Pulley Dia.: 45 mm - 1.77 Inch
 Strength: 1.8 daN/cm - 10 lbs/Inch
 Operating Temp.: -4 to +158° F
 Belt description: Smooth x Negative Pyramid

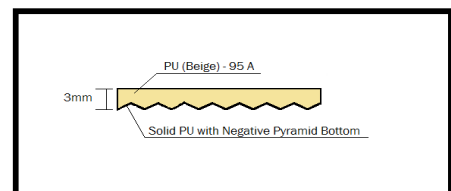


3mm PU BB Beige SxS #450130

Thickness: 3.00 mm - 0.118 Inch
 Minimum Pulley Dia.: 45 mm - 1.77 Inch
 Strength: 1.8 daN/cm - 10 lbs/Inch
 Operating Temp.: -4 to +158° F
 Belt description: Smooth x Smooth

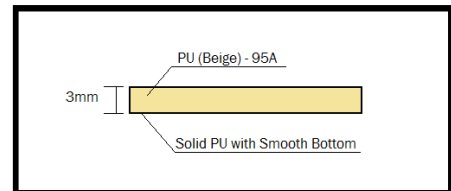


3mm PU BB Blue SxE #450122

Thickness: 3.00 mm - 0.118 Inch
 Minimum Pulley Dia.: 45 mm - 1.77 Inch
 Strength: 1.8 daN/cm - 10 lbs/Inch
 Operating Temp.: -4 to +158° F
 Belt description: Smooth x Negative Pyramid

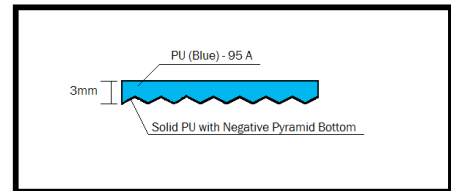


3mm PU BB Blue SxS #450120

Thickness: 3.00 mm - 0.118 Inch
 Minimum Pulley Dia.: 45 mm - 1.77 Inch
 Strength: 1.8 daN/cm - 10 lbs/Inch
 Operating Temp.: -4 to +158° F
 Belt description: Smooth x Smooth

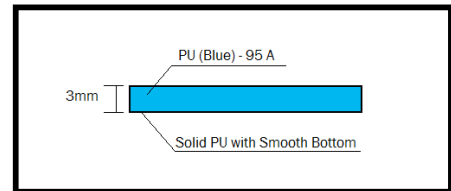

2mm PU BB Blue SxE #450100

Thickness: 2.00 mm - 0.079 Inch
 Minimum Pulley Dia.: 30 mm - 1.18 Inch
 Strength: 1.2 daN/cm - 6.9 lbs/Inch
 Operating Temp.: -4 to +158° F
 Belt description: Smooth x Negative Pyramid

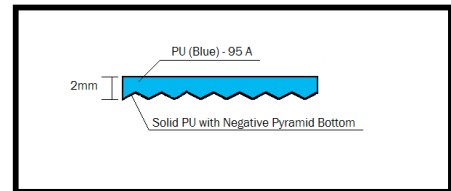

2mm PU BB Blue SxS #450115

Thickness: 2.00 mm - 0.079 Inch
 Minimum Pulley Dia.: 30 mm - 1.18 Inch
 Strength: 1.2 daN/cm - 6.9 lbs/Inch
 Operating Temp.: -4 to +158° F
 Belt description: Smooth x Smooth

