



Universal Belting Resource

UNIVERSAL BELTING RESOURCE
"Working Through Distribution"

Conveyor Belts Fitted With Cleats and Sidewalls

Additional Customer Details required before fabrication

Customer name: _____ Date: _____

- 1 Length of flight and position from edge of belt if inset
Cleat Length: _____ Inset: _____
- 2 Pitch of Cleats: _____ Number of Cleats to be welded to belt: _____
- 3 Number of Cleats to be supplied loose: _____ Total number: _____
- 4 Special instructions: _____


If cleats are to be fitted between sidewalls, these will have a base dimension of just under the distance between the sidewall bases and the overall length of just under the distance between the sidewalls. This avoids distortion of either the sidewall convolutions or the flights.

Tick as required

Cleats will be cut as A, with **Vertical ends**. (note: for PU belts only)

Cleats will be cut as B, **No overlap on sidewall foot**. (note: for PU & PVC)

Even if A is requested this will not totally eliminate small products moving around the end of some cleats.

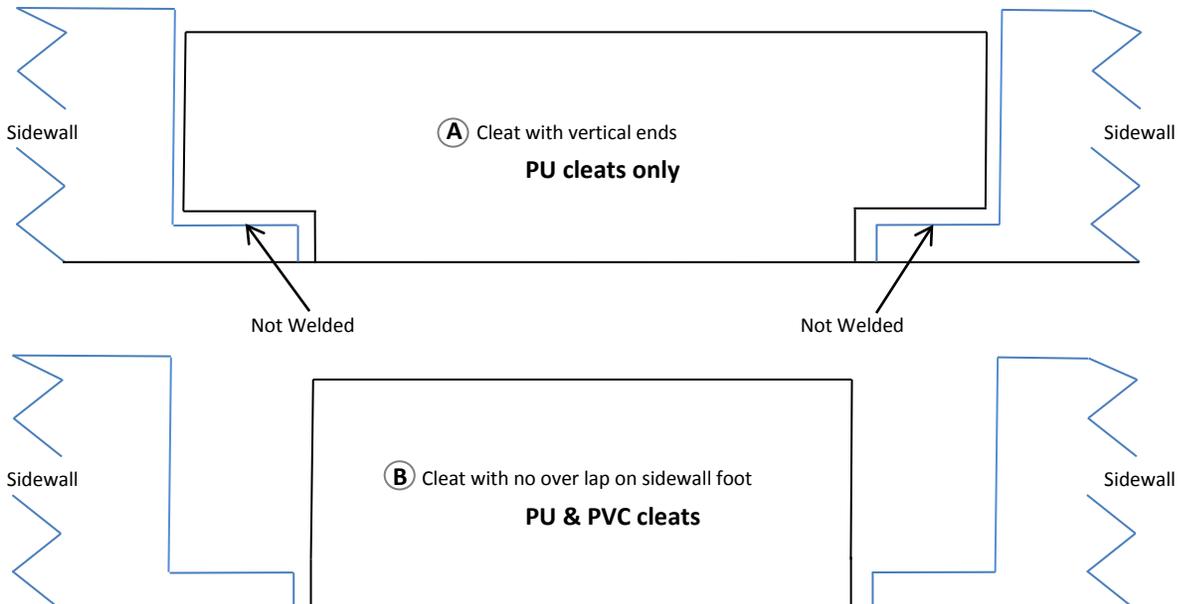



Universal Belting Resource

UNIVERSAL BELTING RESOURCE
"Working Through Distribution"


Conveyor Belts Fitted With Cleats and Sidewalls

Additional Customer Details required before fabrication

Customer name: _____ Date: _____

Please insert the required dimensions in the relevant brackets:

1. Belt Length: _____ Tolerances: (Width) _____ (Length) _____ (Cleats/Sidewall) _____

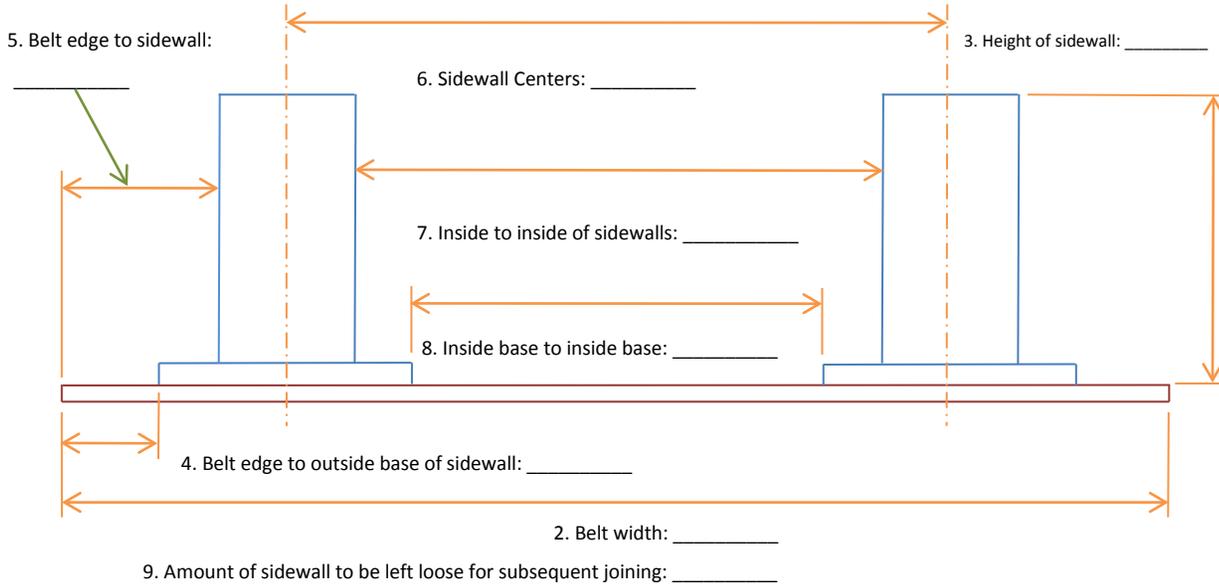

Customer must establish whether item 4, 5 or 7 is the critical dimension: _____

