

Introducing the "Slab only" program

The best just got better with Universal Belting Resource introducing the new "slab only" program. With this program UBR will be able to supply a quality product at a very competitive price. Not only will our customers be able to purchase a slab at an unmatched price but know that the slab you need will always be in stock.

The program offers seven types of different PVC materials by the slab. Most slabs can ship out the same day—one business day at the latest. All slabs are completely crated with the freight paid.

Slab Only Program List :

#261206 V65/2E LC White NPY

#261217 0/V/2E-0 White

#261211 V85/2E LC AS Black Matt

#261209 V85/2E-AS Green Gloss

#261210 V85/2E-AS Green Gloss 3.2m

#261205 V65/2E LC White Gloss

#261201 V45 XH/2E AS Green SG

#261200 V35 XH/2E AS Grey LR

UNIVERSAL BELTING RESOURCE

"Working Through Distribution"

For Additional information and or samples please contact customer service at customers@ubelting.com or call 800-928-9995




#2 Paisley Park
Carmichaels PA 15320



Material Specs


V35 XH/2E AS Gray LR #261200

Thickness: 2.70 mm - 0.106 Inch
 Minimum Pulley Dia.: 50 mm - 2.00 Inch
 Strength: 11 daN/cm - 62 lbs/Inch
 Operating Temp.: -4 to +158° F
 Cover description: Gray Longitudinal Groove

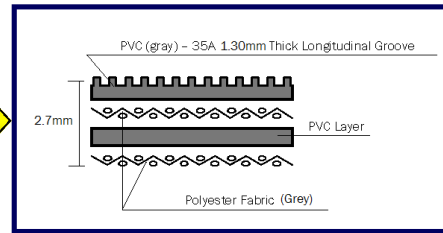


V 45 XH/2E AS Green SG #261201

Thickness: 5.0 mm - 0.197 Inch
 Minimum Pulley Dia.: 60 mm - 2.36 Inch
 Strength: 10 daN/cm - 57 lbs/Inch
 Operating Temp.: -13 to +150° F
 Cover description: Green Rough Top

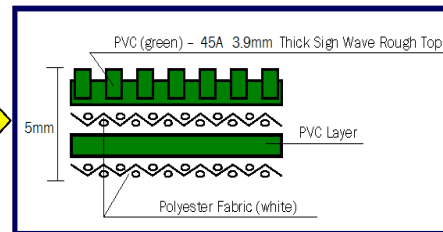


V65/2E LC White NPY #261206

Thickness: 2.19 mm - 0.086 Inch
 Minimum Pulley Dia.: 50 mm - 2.00 Inch
 Strength: 10 daN/cm - 57 lbs/Inch
 Operating Temp.: +14 to +158° F
 Cover description: White Negative Pyramid

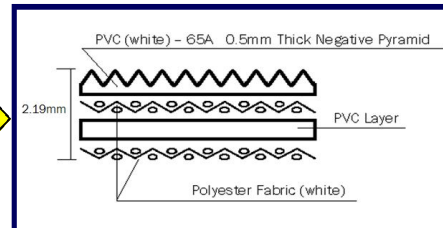


V 85/2E LC AS Black Matt #261211

Thickness: 2.0 mm - 0.078 Inch
 Minimum Pulley Dia.: 25 mm - 0.98 Inch
 Strength: 10 daN/cm - 57 lbs/Inch
 Operating Temp.: +5 to +194° F
 Cover description: Black Matt

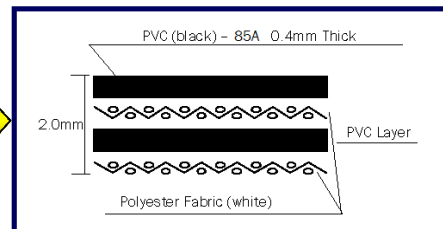


V 85/2E-AS Green Gloss #261209 (2.0m) / #261210 (3.2m)

Thickness: 2.0 mm - 0.078 Inch
 Minimum Pulley Dia.: 25 mm - 0.98 Inch
 Strength: 10 daN/cm - 57 lbs/Inch
 Operating Temp.: +14 to +194° F
 Cover description: Green Gloss

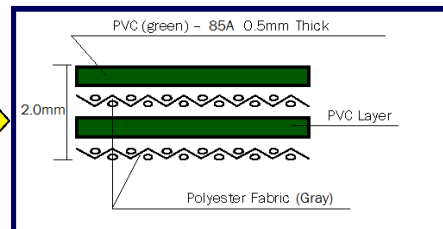


V65/2E LC White Gloss #261205

Thickness: 2.0 mm - 0.078 Inch
 Minimum Pulley Dia.: 25 mm - 0.98 Inch
 Strength: 10 daN/cm - 57 lbs/Inch
 Operating Temp.: +14 to +230° F
 Cover description: White Gloss

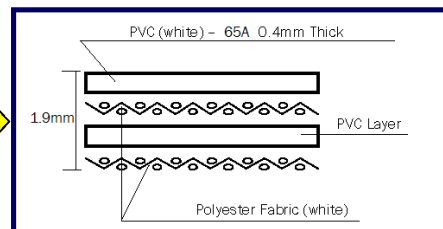

0/V/2E-0 White #261217

Thickness: 1.76 mm - 0.069 Inch
 Minimum Pulley Dia.: 20 mm - 0.79 Inch
 Strength: 8 daN/cm - 46 lbs/Inch
 Operating Temp.: -4 to +176° F
 Cover description: White Bare Fabric

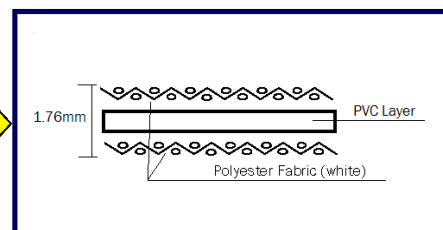

For Additional information and or samples please contact customer service at customers@ubelting.com or call 800-928-9995