


100257

U92 XH/2EX AS Clear Gloss

PU

Material Construction


Surface	Conveying	Material	PU
		Profile	Glossy
		Color	Transparent
		Coefficient of friction	N/A
Tension Member	Material	Polyester Fabric	
	Plies	2	
Underside	Material	Polyester Fabric	
	Profile	PU Impregnated	
	Color	Transparent	
	Coefficient of friction	0.25	

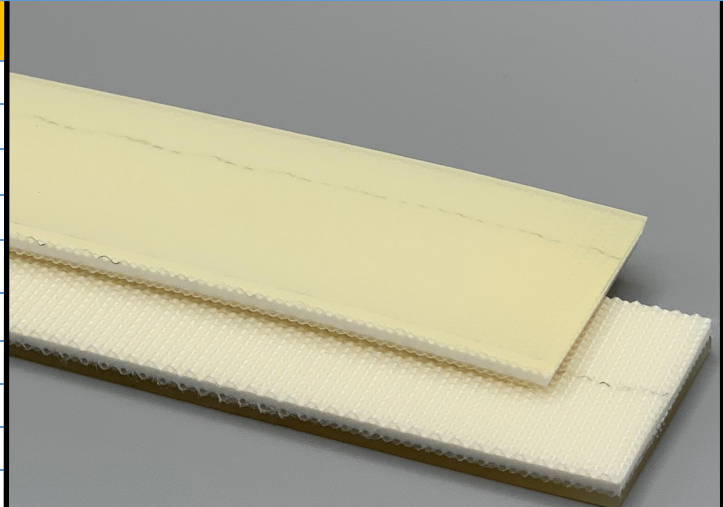

Technical Specifications

Overall Thickness	3.70 mm	0.146 in.
Weight	4.20 kg/m ²	0.86 lbs./ft ²
Maximum Width	2,540 mm	100.00 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	100.00 mm	3.937 in.
Minimum Back Flex	150.00 mm	5.906 in.
Load for 1% Extension (Dynamic)	6 N/mm	34.26 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-10/70 °C	14/158 °F
Cover Durometer	92 Shore A	

Material Build

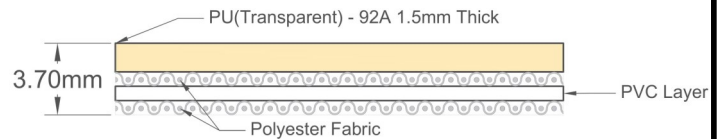

Features

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications

Longitudinal Splice	YES	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	YES

Notes

2 Ply Monofilament - Cover One Side Heavy Cover 2 Ply, Great For Stamping Applications

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	165°C 329°F	165°C 329°F	120 s	Top	Clear PU	Smooth Teflon/ Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	165°C 329°F	165°C 329°F	60 s	Top	Clear PU	Smooth Teflon/ Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UX-1
Staple Lace	RS125

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

