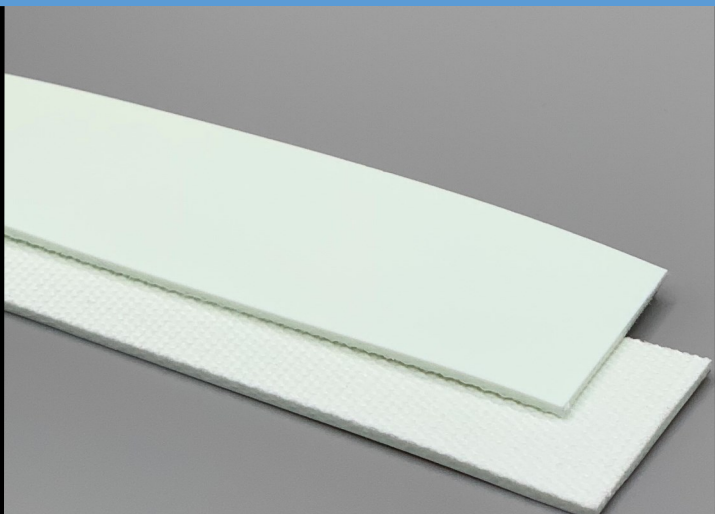


110200
U85/2ES M White
PU
Material Construction

Conveying Surface	Material	PU
	Profile	Matt
	Color	White
	Coefficient of friction	N/A
Tension Member	Material	Spun Polyester Fabric
	Plies	2
Underside	Material	Spun Polyester Fabric
	Profile	PU Impregnated
	Color	White
	Coefficient of friction	0.25


Technical Specifications

Overall Thickness	1.65 mm	0.065 in.
Weight	1.75 kg/m ²	0.36 lbs./ft ²
Maximum Width	3,150 mm	124.00 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	10.00 mm	0.394 in.
Minimum Back Flex	25.00 mm	0.984 in.
Load for 1% Extension (Dynamic)	6 N/mm	34.26 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-30/80 °C	-22/176 °F
Cover Durometer	85 Shore A	

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	NO
Anti-Microbial	NO		


Standard Fabrications

Longitudinal Splice	NO	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

2 ply spun fabric matte top cover. Suitable for curve belts, metal detectors, general bakery and confectionary lines. Excellent for older and problematic equipment.

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

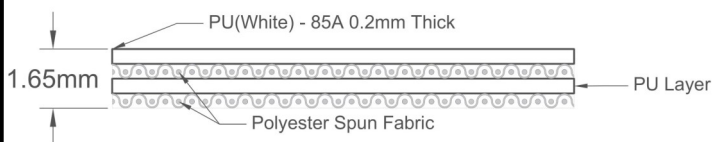Material Build

Splicing Instructions
High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	165°C 329°F	165°C 329°F	90 s	Top	White PU	Matte/ Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	165°C 329°F	165°C 329°F	45 s	Top	White PU	Matte/ Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62