

110400

U0/3ES White Rib

PU

Material Construction

Surface	Conveying	Material	Spun Polyester Fabric
		Profile	Bare Ribbed fabric
		Color	White
		Coefficient of friction	0.25
Tension Member		Material	Spun Polyester Fabric
		Plies	3
Underside		Material	Spun Polyester Fabric
		Profile	Bare Fabric
		Color	White
		Coefficient of friction	0.25



Technical Specifications

Overall Thickness	2.50 mm	0.098 in.
Weight	2.60 kg/m ²	0.53 lbs./ft ²
Maximum Width	3,080 mm	121.25 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	50.00 mm	1.969 in.
Minimum Back Flex	50.00 mm	1.969 in.
Load for 1% Extension (Dynamic)	8 N/mm	45.68 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-30/80 °C	-22/176 °F
Cover Durometer	0 Shore A	

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	NO
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	NO
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	YES

Notes

3 Ply spun fabric with rough structure great for dough release

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

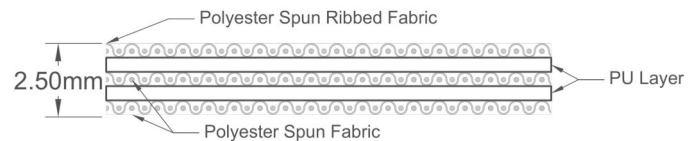

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	165°C 329°F	165°C 329°F	120 s	Bottom	White PU	Matte/ Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	165°C 329°F	165°C 329°F	60 s	Bottom	White PU	Matte/ Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36
Staple Lace	RS62

