


110700

UU92/2ES NPY Gloss LT Blue

PU

Material Construction


Surface	Conveying	Material	PU
		Profile	Glossy
		Color	Light Blue
		Coefficient of friction	N/A
Tension	Member	Material	Spun Polyester Fabric
		Plies	2
Underside		Material	PU
		Profile	Negative Pyramid
		Color	Light Blue
		Coefficient of friction	0.50

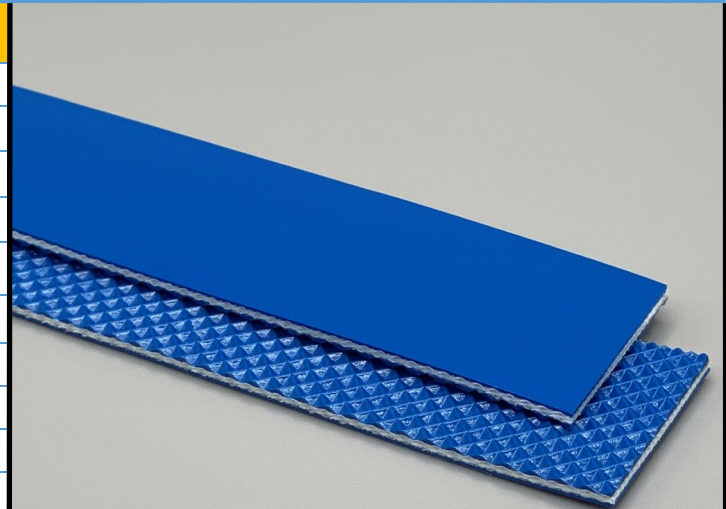

Technical Specifications

Overall Thickness	2.20 mm	0.087 in.
Weight	2.30 kg/m ²	0.47 lbs./ft ²
Maximum Width	3,169 mm	124.75 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	25.00 mm	0.984 in.
Minimum Back Flex	25.00 mm	0.984 in.
Load for 1% Extension (Dynamic)	6 N/mm	34.26 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-20/100 °C	-4/212 °F
Cover Durometer	92 Shore A	

Material Build

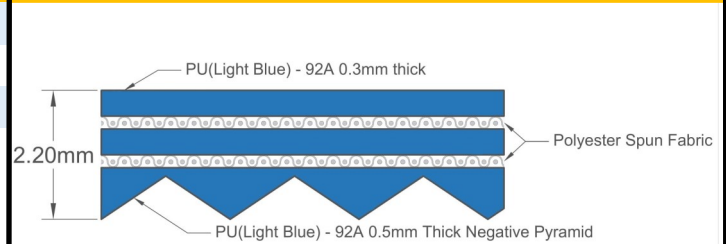

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	NO
Anti-Microbial	NO		

Standard Fabrications

Longitudinal Splice	NO	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

Laterally flexible for conformance to troughs with inverted diamond / pyramid bottom surface for reducing drag or friction over tables or slider bed surfaces.

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	165°C 329°F	165°C 329°F	120 s	Top	Light Blue PU	Gloss/ Impression Pad

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	165°C 329°F	165°C 329°F	60 s	Top	Light Blue PU	Gloss/ Impression Pad

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

