


120218
UX92/2E AS LSQ White
PU

Material Construction

Conveying Surface	Material	PU
	Profile	Mini Negative Pyramid
	Color	White
	Coefficient of friction	N/A
Tension Member	Material	Polyester Fabric
	Plies	2
Underside	Material	Polyester Fabric
	Profile	Heavy Impregnation
	Color	Light Blue
	Coefficient of friction	0.25

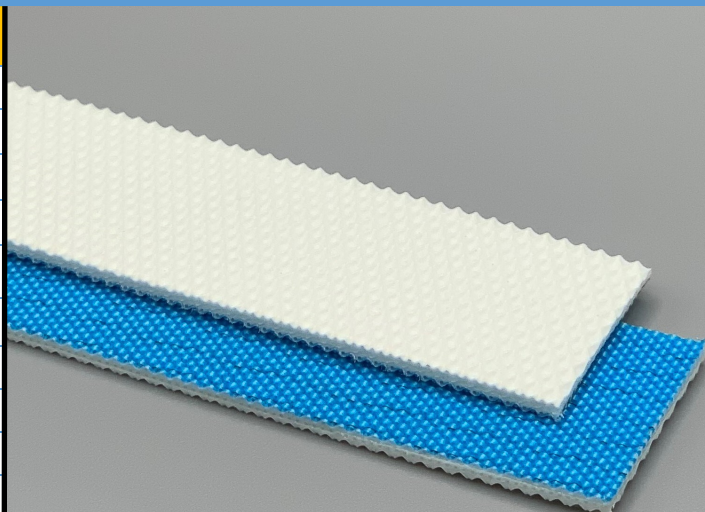

Technical Specifications

Overall Thickness	1.70 mm	0.067 in.
Weight	1.70 kg/m ²	0.35 lbs./ft ²
Maximum Width	3,000 mm	118.13 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	20.00 mm	0.787 in.
Minimum Back Flex	28.00 mm	1.102 in.
Load for 1% Extension (Dynamic)	8 N/mm	45.68 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-20/90 °C	-4/194 °F
Cover Durometer	92 Shore A	

Features

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

Fine diamond top cover provides excellent release qualities.
Blue Extra heavy impregnation on bottom surface.

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

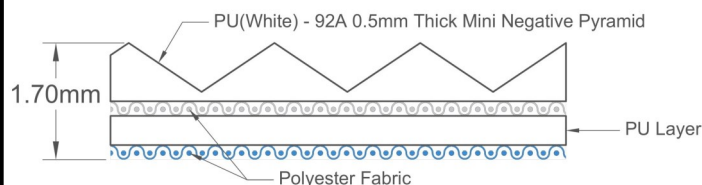

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	165°C 329°F	165°C 329°F	180 s	Top	White PU	Impression Pad/Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	165°C 329°F	165°C 329°F	120 s	Top	White PU	Impression Pad/Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62