


140200

0/2EC-0 PET/Cotton Bare White

PVC

Material Construction


Surface	Conveying	Material	Polyester/Cotton
	Profile	Bare	
	Color	Beige	
	Coefficient of friction	N/A	
Tension Member	Material	Polyester Fabric	
	Plies	2	
Underside	Material	Polyester Fabric	
	Profile	Bare	
	Color	Beige	
	Coefficient of friction	0.25	

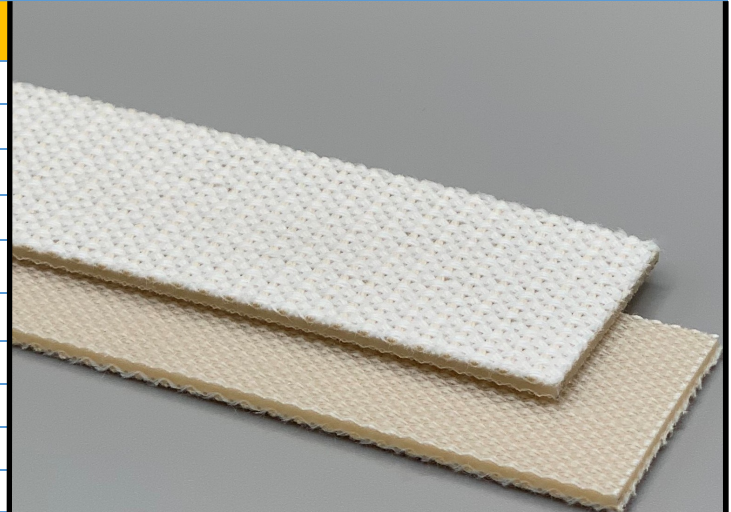

Technical Specifications

Overall Thickness	2.20 mm	0.087 in.
Weight	2.10 kg/m ²	0.43 lbs./ft ²
Maximum Width	2,280 mm	89.75 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	25 mm	0.984 in.
Minimum Back Flex	25 mm	0.984 in.
Load for 1% Extension (Dynamic)	4 N/mm	22.84 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-10/80 °C	14/176 °F
Cover Durometer	N/A Shore A	

Material Build

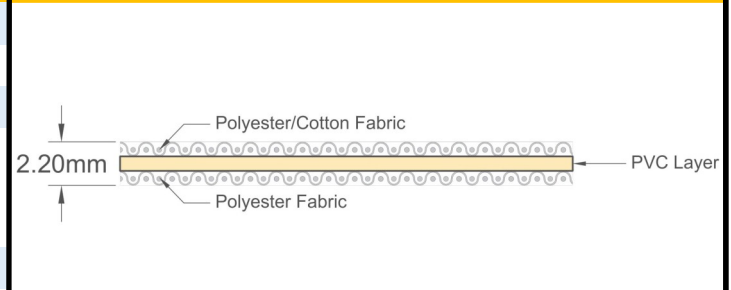

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	NO
Anti-Microbial	NO		

Standard Fabrications

Longitudinal Splice	YES	Cleats	NO
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	YES

Notes

2 Ply Corse Structured Polyester / Cotton Top, Polyester Bottom, Bare x Bare With PVC Inner Layer. Great For Dough Applications.

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	175°C 347°F	175°C 347°F	90 s	N/A	None	Silicone/ Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	170°C 338°F	170°C 338°F	30 s	N/A	None	Silicone/ Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Finger Over Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

