


268307

3P120/10/0 G Green

PVC

Material Construction

Conveying Surface	Material	PVC
	Profile	Glossy
	Color	Green
	Coefficient of friction	N/A
Tension Member	Material	Polyester Fabric
	Plies	3
Underside	Material	Polyester Fabric
	Profile	Impregnated
	Color	White
	Coefficient of friction	0.25

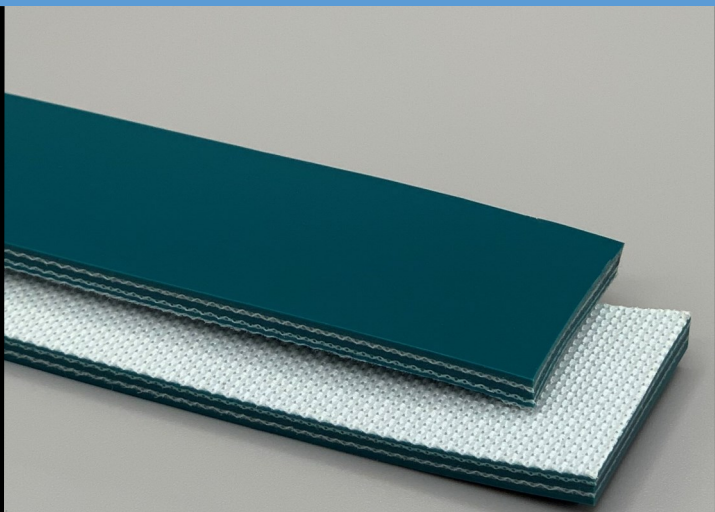

Technical Specifications

Overall Thickness	4.00 mm	0.157 in.
Weight	4.62 kg/m ²	0.95 lbs./ft ²
Maximum Width	3,000 mm	118.125 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	80 mm	3.15 in.
Minimum Back Flex	150 mm	5.906 in.
Load for 1% Extension (Dynamic)	12 N/mm	68.52 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-10/80 °C	14/176 °F
Cover Durometer		80 Shore A

Features

FDA	NO	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications

Longitudinal Splice	YES	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

3 Ply Monofilament - cover one side

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build



Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
N/A	N/A°C N/A°F	N/A°C N/A°F	N/A s	N/A	N/A	N/A/N/A

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	180°C 356°F	175°C 347°F	240 s	Top	Green PVC	Gloss/Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Finger Over Finger
Clipper Lace	U2
Staple Lace	RS125