


**269140**

**2P100/RT/01 White**

**PVC**

**Material Construction**


Surface	Conveying	Material	PVC
		Profile	Sinewave Rough Top
		Color	White
		Coefficient of friction	N/A
Tension Member		Material	Polyester Fabric
		Plies	2
Underside		Material	Polyester Fabric
		Profile	Impregnated
		Color	White
		Coefficient of friction	0.25

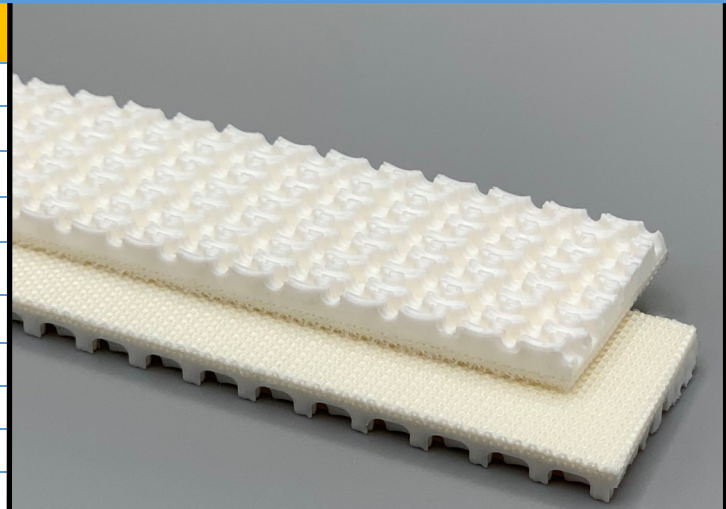

**Technical Specifications**

Overall Thickness	4.50 mm	0.177 in.
Weight	4.05 kg/m <sup>2</sup>	0.83 lbs./ft <sup>2</sup>
Maximum Width	3,000 mm	118.125 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	70 mm	2.756 in.
Minimum Back Flex	120 mm	4.724 in.
Load for 1% Extension (Dynamic)	8 N/mm	45.68 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-10/80 °C	14/176 °F
Cover Durometer	60 Shore A	

**Material Build**

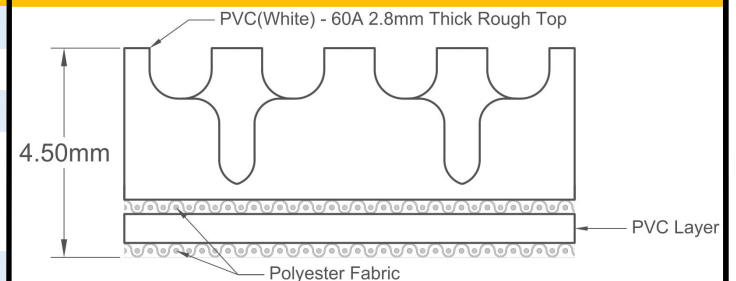

**Features**

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

**Standard Fabrications**

Longitudinal Splice	YES	Cleats	YES
Guide Applied to Cover	NO	Guide Applied to Bottom	YES
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

**Notes**

2 Ply polyester with Sine wave rough top profiled cover

\*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

**Splicing Instructions**

**High Speed Press Settings**

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
N/A	N/A°C	N/A°C	N/A s	N/A	N/A	N/A/N/A
	N/A°F	N/A°F				

**Water Cooled Press Settings**

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	175°C	170°C	240 s	N/A	None	Impression Pad/Rough Teflon
	347°F	338°F				

\*These settings are a guideline only, every press is different. Test splicing is recommended.

**Standard Splices**

Endless	Single Finger
Clipper Lace	Recessed UCM36 SP
Staple Lace	RS62 Recessed

