


269180

2P100/ST/0 White

PVC

Material Construction


Surface	Conveying	Material	PVC
		Profile	Saw Tooth
		Color	White
		Coefficient of friction	N/A
Member	Tension	Material	Polyester Fabric
		Plies	2
Underside		Material	Polyester Fabric
		Profile	Bare
		Color	White
		Coefficient of friction	0.25

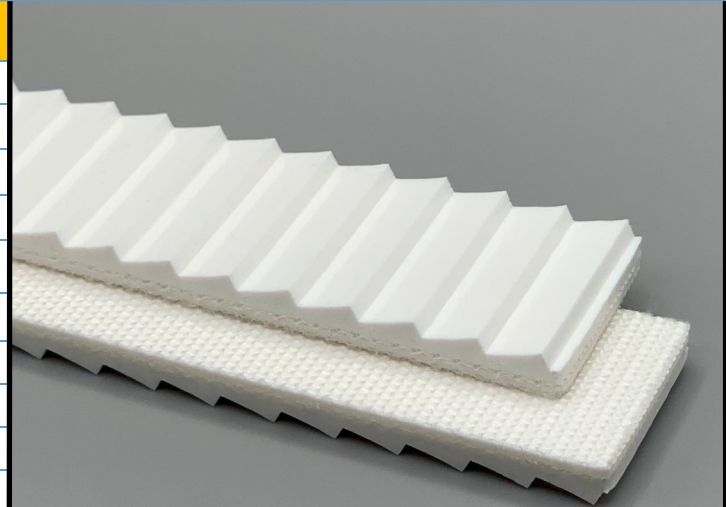

Technical Specifications

Overall Thickness	4.90 mm	0.193 in.
Weight	5.3 kg/m ²	1.09 lbs./ft ²
Maximum Width	1,200 mm	47.25 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	60 mm	2.362 in.
Minimum Back Flex	90 mm	3.543 in.
Load for 1% Extension (Dynamic)	8 N/mm	45.68 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-10/80 °C	14/176 °F
Cover Durometer	60 Shore A	

Material Build

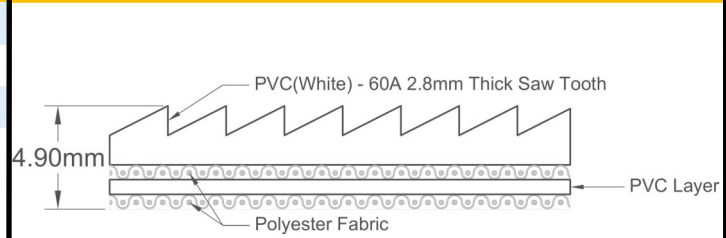

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications

Longitudinal Splice	NO	Cleats	NO
Guide Applied to Cover	NO	Guide Applied to Bottom	YES
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	NO

Notes

2 Ply Monofilament - cover one side with saw tooth profile. Excellent for incline and decline applications

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
N/A	N/A°C N/A°F	N/A°C N/A°F	N/A s	N/A	N/A	N/A/N/A

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	175°C 347°F	170°C 338°F	240 s	N/A	None	Impression Pad/Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	Recessed UCM36 SP
Staple Lace	RS62 Recessed

