


**330219**

**P92/2 KENF AS Blue Matt**

**PU**

**Material Construction**

Surface	Conveying	Material	Polyolefin
		Profile	Matt
		Color	Blue
		Coefficient of friction	N/A
Tension Member	Material	Non-Fray Polyester Fabric	
	Plies	2	
Underside	Material	Non-Fray Polyester Fabric	
	Profile	PU Impregnated	
	Color	Blue	
	Coefficient of friction	0.20	

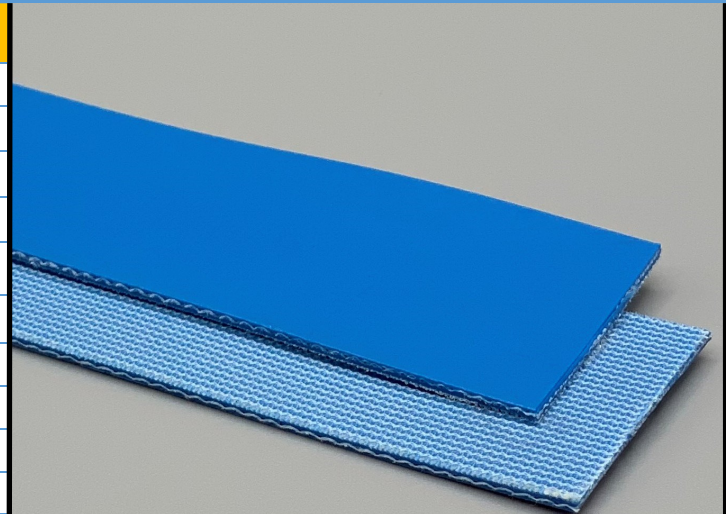

**Technical Specifications**

Overall Thickness	1.10 mm	0.043 in.
Weight	1.00 kg/m <sup>2</sup>	0.2 lbs./ft <sup>2</sup>
Maximum Width	2,950 mm	116.14 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	6.00 mm	0.236 in.
Minimum Back Flex	20.00 mm	0.787 in.
Load for 1% Extension (Dynamic)	4 N/mm	22.84 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-40/60 °C	-40/140 °F
Cover Durometer	92 Shore A	

**Material Build**



**Features**

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	NO
Anti-Microbial	NO		

**Standard Fabrications**

Longitudinal Splice	NO	Cleats	NO
Guide Applied to Cover	NO	Guide Applied to Bottom	NO
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	NO

**Notes**

Extremely flexible non fray construction suitable for small nose bars offers fantastic release of a wide variety of sticky materials. Product is easy to clean, hydrolysis resistant and abrasive resistant for great longevity and dependability. Power turn suitable.

\*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

**Splicing Instructions**

**High Speed Press Settings**

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	140°C 284°F	140°C 284°F	45 s	Top	Clear PE	Matte/ Silicone

**Water Cooled Press Settings**

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	140°C 284°F	140°C 284°F	30 s	Top	Clear PE	Matte/ Silicone

\*These settings are a guideline only, every press is different. Test splicing is recommended.

**Standard Splices**

Endless	Single Finger
Clipper Lace	UCM36 XSP
Staple Lace	N/A

