

330221
P92/2 KENF AS White Matt
PU

Material Construction

Conveying Surface	Material	Polyolefin
	Profile	Matt
	Color	White
	Coefficient of friction	N/A
Tension Member	Material	Non-Fray Polyester Fabric
	Plies	2
Underside	Material	Non-Fray Polyester Fabric
	Profile	Impregnated
	Color	White
	Coefficient of friction	0.20



Technical Specifications

Overall Thickness	1.10 mm	0.043 in.
Weight	1.00 kg/m ²	0.2 lbs./ft ²
Maximum Width	2,950 mm	116.14 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	6.00 mm	0.236 in.
Minimum Back Flex	20.00 mm	0.787 in.
Load for 1% Extension (Dynamic)	4 N/mm	22.84 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-40/60 °C	-40/140 °F
Cover Durometer	92 Shore A	

Features

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	NO
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	NO
Guide Applied to Cover	NO	Guide Applied to Bottom	NO
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	NO

Notes

Extremely flexible non fray construction suitable for small nose bars offers fantastic release of a wide variety of sticky materials. Product is easy to clean, hydrolysis resistant and abrasive resistant for great longevity and dependability.
Lay-flat construction is also Powerturn suitable.

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

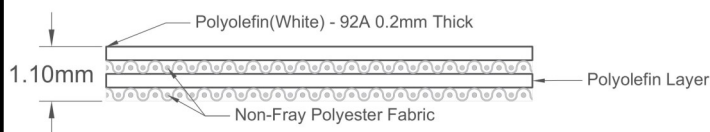

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	140°C 284°F	140°C 284°F	45 s	Top	Clear PE	Matte/ Silicone

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	140°C 284°F	140°C 284°F	30 s	Top	Clear PE	Matte/ Silicone

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 XSP
Staple Lace	N/A