


330222

A92/2 ENF AS Matt Cobalt Blue

PU

Material Construction

Surface	Conveying	Material	Polyolefin
		Profile	Matt
		Color	Cobalt Blue
		Coefficient of friction	N/A
Tension Member		Material	Non-Fray Polyester Fabric
		Plies	2
Underside		Material	Non-Fray Polyester Fabric
		Profile	Impregnated
		Color	White
		Coefficient of friction	0.25

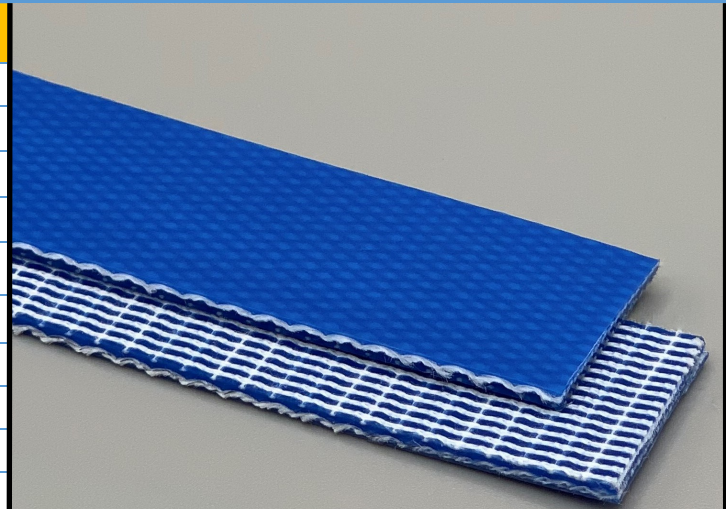

Technical Specifications

Overall Thickness	2.00 mm	0.079 in.
Weight	1.90 kg/m ²	0.39 lbs./ft ²
Maximum Width	3,200 mm	126.00 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	40.00 mm	1.575 in.
Minimum Back Flex	60.00 mm	2.362 in.
Load for 1% Extension (Dynamic)	7 N/mm	39.97 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-10/60 °C	14/140 °F
Cover Durometer	92 Shore A	

Features

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	NO
Guide Applied to Cover	NO	Guide Applied to Bottom	NO
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	NO

Notes

2 Ply Blue Polyolefin Monofilament - Cover One Side With Non-Fray Fabric.

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

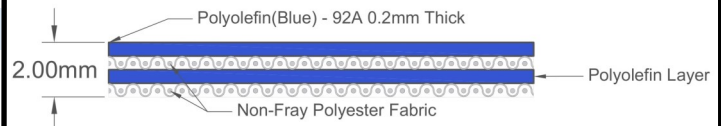

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	140°C 284°F	140°C 284°F	45 s	Top	Clear PE	Matte/ Silicone

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	140°C 284°F	140°C 284°F	30 s	Top	Clear PE	Matte/ Silicone

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62

