



UNIVERSAL BELTING RESOURCE

Industrial Lightweight Belting

1-800-928-9995

Customers@Ubelting.com

Product Data Sheet


450100

FB2BLES Glossy Blue

PURclean

Material Construction


Composition	Material	TPU-Thermoplastic Polyurethane
	Color	Sky Blue
	Hardness (Shore "A")	98
	Tension Member	TPU Non-Reinforced
Surface Feature	Top	Glossy
	Bottom	Negative Pyramid
COF	Top	0.31
	Bottom	0.52

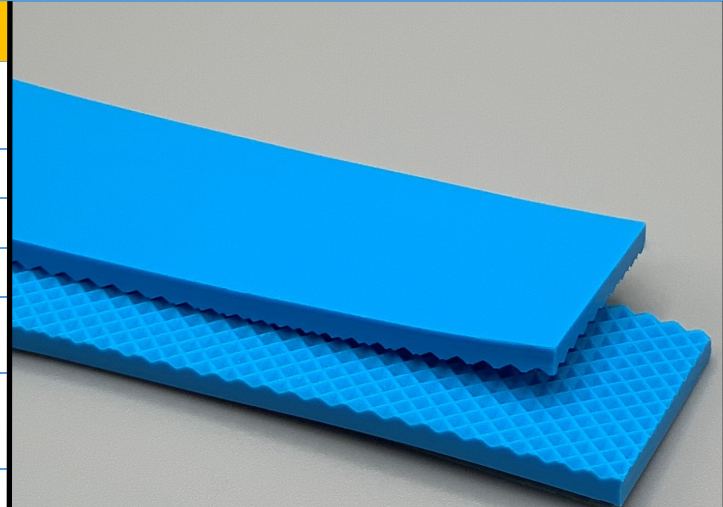

Technical Specifications

Overall Thickness	2.01 mm	0.079 in.
Weight	2.24 kg/m ²	0.46 lbf/ft ²
Maximum Width	1,524 mm	60 in.
Minimum Pulley/Nose Bar		
Diameter For Endless Butt Splice	30 mm	1.181 in.
Minimum Back Flex	30 mm	1.181 in.
Load For 1% Extension	2.0 N/mm	11.42 lbs/in.
Standard Tension	0.75%	
Operational Temperature Range	-9/71°C	16/160°F

Material Build

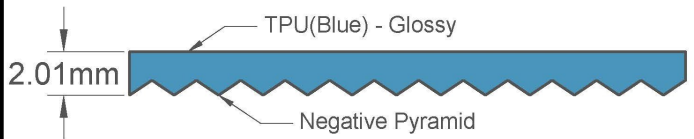

90° Butt Splice Instructions

Standard Amigo Press Settings		
*Follow basic Amigo operating instructions		
Pre-heat Temperature	Pre-heat Time	Weld Time
95°C	300 s	50-55 s
*These settings are a guideline only, every press is different. Test splicing is recommended.		

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	YES	Reinforced	NO
USDA Dairy	YES	Elastic	NO

Standard Splices

Butt Splice	Recommended
Soft Hinge Lace	Recommended

Alternative Lace Options

Staple Lace	RS62
Plastic Rivet Lace	APF-100

Notes

Homogeneous urethane construction

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

