



UNIVERSAL BELTING RESOURCE

Industrial Lightweight Belting

1-800-928-9995

Customers@Ubelting.com

Product Data Sheet


450137

FB7BLEP50 95 Sky Blue

PURclean

Material Construction


Composition	Material	TPU-Thermoplastic Polyurethane
	Color	Sky Blue
	Hardness (Shore "A")	95
	Tension Member	TPU Non-Reinforced
Surface Feature	Top	P50 Round Oval Profile
	Bottom	Negative Pyramid
COF	Top	N/A
	Bottom	0.31

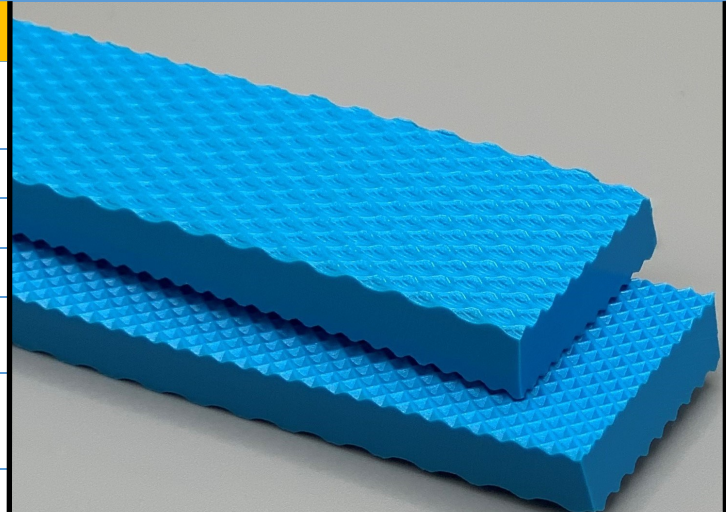

Technical Specifications

Overall Thickness	6.80 mm	0.268 in.
Weight	7.18 kg/m ²	1.47 lbf/ft ²
Maximum Width	762 mm	30 in.
Minimum Pulley Diameter When Used As Cleat	100 mm	3.937 in.
Minimum Back Flex	N/A	N/A
Load For 1% Extension	N/A	N/A
Standard Tension	N/A	
Operational Temperature Range	-9/71°C	16/160°F

Material Build

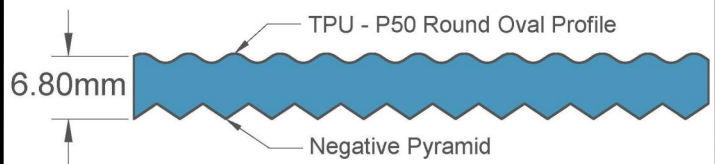

90° Butt Splice Instructions

Standard Amigo Press Settings

*Follow basic Amigo operating instructions

Pre-heat Temperature	Pre-heat Time	Weld Time
N/A°C	N/A s	N/A s

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Butt Splice	N/A
Soft Hinge Lace	N/A

Alternative Lace Options

Staple Lace	N/A
Plastic Rivet Lace	N/A

Notes

Material stocked in 30" x 54" sheets.

Used for **cleats only**, not for belting material.



FDA	YES	Anti-Static	NO
USDA Meat and Poultry	YES	Reinforced	NO
USDA Dairy	YES	Elastic	NO

Standard Fabrications

Cleats	NO	Footless Sidewall	NO
Guide on Top	NO	Footed Sidewall	NO
Guide on Bottom	NO		

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.