


**455350**

**CD3BLSS 12 Blue**

**PURclean**

**Material Construction**

Composition	Material	TPU-Thermoplastic Polyurethane
	Color	Sky Blue
	Hardness (Shore "A")	98
	Tension Member	TPU Non-Reinforced
Surface Feature	Top	Matt
	Bottom	Smooth w/center lug 39.7 mm Ctrs.
COF	Top	0.52
	Bottom	0.52

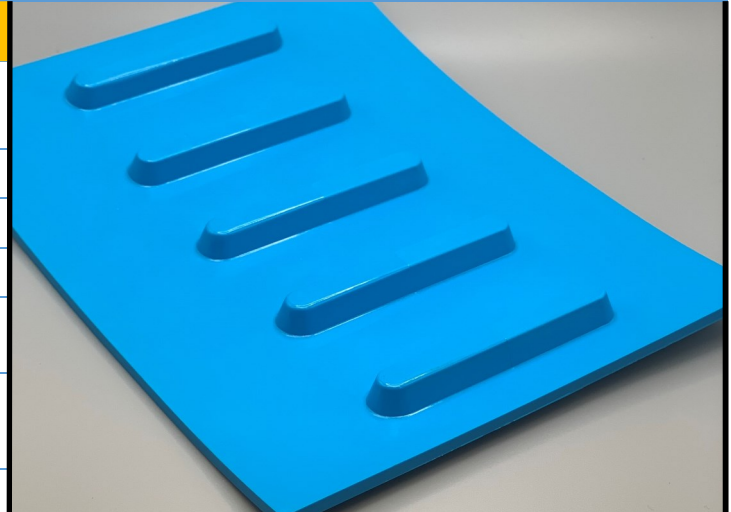

**Technical Specifications**

Overall Thickness	3.40 mm	0.134 in.
Weight	4.54 kg/m <sup>2</sup>	0.93 lbf/ft <sup>2</sup>
Maximum Width *	305 mm	12.000 in.
Minimum Pulley/Nose Bar Diameter For Endless Butt Splice	80 mm	3.15 in.
Minimum Back Flex	98 mm	3.858 in.
Load For 1% Extension	3.0 N/mm	17.13 lbs/in.
Standard Tension	0.3%	
Operational Temperature Range	-9/71°C	16/160°F

**Features**

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	YES	Reinforced	NO
USDA Dairy	YES	Elastic	NO


**Standard Fabrications**

Cleats	YES	Footless Sidewall	YES
Guide on Top	YES	Footed Sidewall	YES
Guide on Bottom	YES		

\*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

\*The Center Drive material is stocked in specific widths up to 60 in wide.

**Material Build**

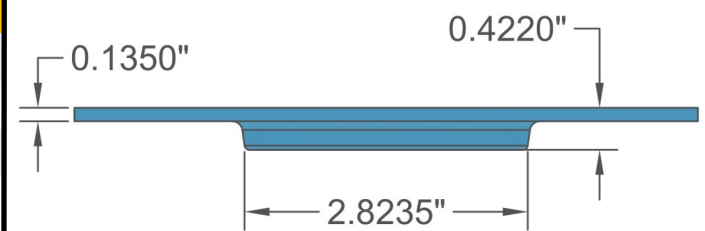

**90° Butt Splice Instructions**

**Standard Amigo Press Settings**

\*Follow basic Amigo operating instructions

Pre-heat Temperature	Pre-heat Time	Weld Time
95°C	300 s	50-55 s

\*These settings are a guideline only, every press is different. Test splicing is recommended.

**Standard Splices**

Butt Splice	Recommended
Soft Hinge Lace	Recommended

**Alternative Lace Options**

Staple Lace	RS125
Plastic Rivet Lace	Not Recommended

**Notes**

Homogeneous urethane construction with a single row of drive lugs down the center.

