




UNIVERSAL BELTING RESOURCE
Working Through Distribution

DISTRIBUTION ANNOUNCEMENT UU85/2E-AS MATT / GLOSS WHITE

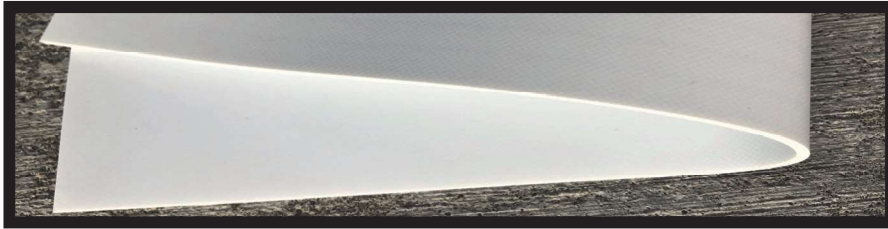

Item # 100405
UU85/2E-AS MATT/GLOSS
WHITE
2 ply smooth top & bottom

Features

- * Food grade components
- * Easy clean top and bottom surface
- * Smooth surfaces easy to rinse
- * Perfect for edge capping
- * Top choice for food applications
- * Excellent for processing and packaging equipment
- * Compliments equipment found in companies worldwide in the meat, poultry, seafood, produce, dairy, medical, and pharmaceutical industries
- * Choose normal matt finish up for lower friction or request glossy surface up for higher friction and product grip
- * Can be fitted with HF welded cleats

Benefits / Applications

- * Perfect for food handling applications
- * Reduces opportunity for contamination
- * Helps reduce water consumption
- * Enhances safe operation with capping
- * Sanitation costs may be reduced
- * Improved thicker—smoother covers for better cleaning and wear over TT122
- * Standard production width of 118"
- * In stock for immediate shipment
- * Fabricated belts shipped in 3-5 days **
- * Competitive pricing increases your profit margins
- * Full technical and fabrication support
- * Smooth cleat to belt easy clean transitions

** Depending on complexity of fabrication

For additional information please contact customer service at
customers@ubelting.com or call 800-928-9995

www.universalbelting.com
customers@ubelting.com

2 Industrial Park Rd
Carmichaels PA 15320
PH: 800-928-9995 FX: 724-966-2452



100405

UU85/2E-AS Matt/Gloss White

PU

Material Construction

Conveying Surface	Material	PU
	Profile	Matt
	Color	White
	Coefficient of friction	0.4
Tension Member	Material	Polyester Fabric
	Plies	2
Underside	Material	PU
	Profile	Glossy
	Color	White
	Coefficient of friction	0.90



Technical Specifications

Overall Thickness	1.50 mm	0.059 in.
Weight	1.60 kg/m ²	0.33 lbs./ft ²
Maximum Width	3,200 mm	126.000 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	30 mm	1.181 in.
Minimum Back Flex	30 mm	1.181 in.
Load for 1% Extension (Dynamic)	6 N/mm	34.26 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-20/100 °C	-4/212 °F
Cover Durometer	85 Shore A	

Features

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	YES	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

2 Ply Monofilament - Smooth Cover Both Sides
 Great For Food Conveyor Applications. Very Hygienic With Both Sides Coated With Urethane.

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

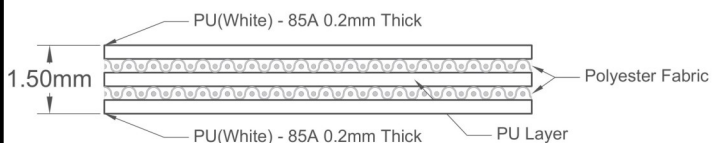

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	74°C 165°F	74°C 165°F	120 s	Top	White PU	Gloss/ Silicone

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	74°C 165°F	74°C 165°F	60 s	Top	White PU	Gloss/ Silicone

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62