




UNIVERSAL BELTING RESOURCE
Working Through Distribution

DISTRIBUTION ANNOUNCEMENT

2P80/05/0 G APPLE GREEN

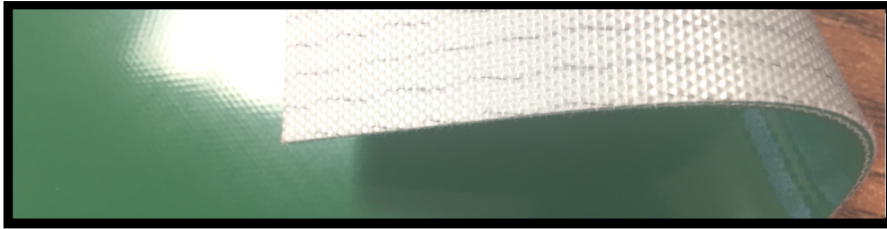

Item # 268210
2 ply PVC Apple Green
"COS food grade"

Features

- * Apple green makes this highly favored in agricultural applications
- * Perfect for a multitude of food conveying and processing applications
- * Commonly used on produce and nut inspection & sorting applications
- * Antistatic construction
- * Highly flexible 2 ply construction
- * In stock up to three meters wide
- * For harvesting applications and other vegetable, fruit and produce processing
- * Direct crossover for several different competitors types

Benefits / Applications

- * Matches OEM colors & minimizes possible belt change conflicts
- * Easy clean "smooth" Food grade PVC top cover construction
- * Helps maintain needed background color for proper equipment operation
- * Helps to protect sensitive electronics
- * Suitable for small pulley transfers
- * Covers most commonly needed widths
- * Easy sell as Apple green is long established as an industry standard
- * Easily interchanged without customer confusion

For additional information please contact customer service at
customers@ubelting.com or call **800-928-9995**

www.universalbelting.com
customers@ubelting.com

2 Industrial Park Rd
Carmichaels PA 15320
PH: 800-928-9995 FX: 724-966-2452




268210

2P80/05/0 G Apple Green

PVC

Material Construction

Conveying Surface	Material	PVC
	Profile	Glossy
	Color	Apple Green
	Coefficient of friction	N/A
Tension Member	Material	Polyester Fabric
	Plies	2
Underside	Material	Polyester Fabric
	Profile	Impregnated
	Color	White
	Coefficient of friction	0.25

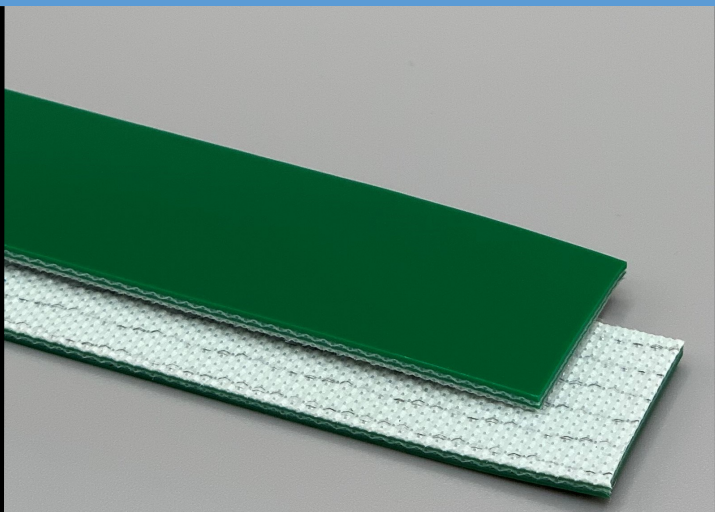

Technical Specifications

Overall Thickness	2.00 mm	0.079 in.
Weight	2.46 kg/m ²	0.5 lbs./ft ²
Maximum Width	3,000 mm	118.125 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	30 mm	1.181 in.
Minimum Back Flex	40 mm	1.575 in.
Load for 1% Extension (Dynamic)	8 N/mm	45.68 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-10/80 °C	14/176 °F
Cover Durometer	80 Shore A	

Features

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications

Longitudinal Splice	YES	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

2 Ply Monofilament - cover one side, noimpregnation on bottom fabric

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build



Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	175°C 347°F	175°C 347°F	240 s	Top	Apple Green PVC	Gloss/Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	175°C 347°F	175°C 347°F	180 s	Top	Apple Green PVC	Gloss/Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62