

120240

UU92/2E RG M Blue

PU

Material Construction

Surface	Conveying	Material	PU
		Profile	Matt
		Color	Blue
		Coefficient of friction	N/A
Tension Member		Material	Polyester Fabric
		Plies	2
Underside		Material	PU
		Profile	Rice Grain
		Color	Blue
		Coefficient of friction	0.50



Technical Specifications

Overall Thickness	1.80 mm	0.071 in.
Weight	2.00 kg/m ²	0.41 lbs./ft ²
Maximum Width	2,000 mm	78.75 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	25.00 mm	0.984 in.
Minimum Back Flex	45.00 mm	1.772 in.
Load for 1% Extension (Dynamic)	11 N/mm	62.81 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-40/90 °C	-40/194 °F
Cover Durometer	92 Shore A	

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

2 Ply monofilament — cover both sides

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

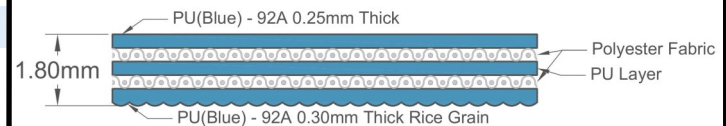

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	165°C 329°F	165°C 329°F	60 s	Top	Light Blue PU	Matte/ Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
30	165°C 329°F	165°C 329°F	30 s	Top	Light Blue PU	Matte/ Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62

