



UNIVERSAL BELTING RESOURCE

Industrial Lightweight Belting

1-800-928-9995

Customers@Ubelting.com

Product Data Sheet


450136

FB3BLEP65 Crescent Blue

PURclean

Material Construction


Composition	Material	TPU-Thermoplastic Polyurethane
	Color	Sky Blue
	Hardness (Shore "A")	95
	Tension Member	TPU Non-Reinforced
Surface Feature	Top	P65 Crescent Top
	Bottom	Negative Pyramid
COF	Top	N/A
	Bottom	0.31

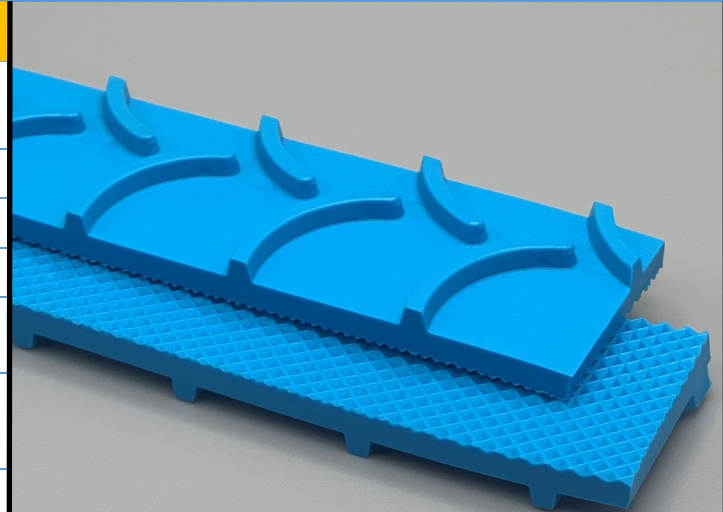

Technical Specifications

Overall Thickness	5.70 mm	0.224 in.
Weight	3.8 kg/m ²	0.78 lbf/ft ²
Maximum Width	1,524 mm	60 in.
Minimum Pulley/Nose Bar		
Diameter For Endless Butt Splice	57 mm	2.244 in.
Minimum Back Flex	57 mm	2.244 in.
Load For 1% Extension	3.0 N/mm	17.13 lbs/in.
Standard Tension	0.75%	
Operational Temperature Range	-9/71°C	16/160°F

Material Build

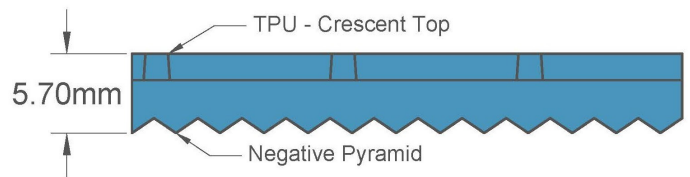

90° Butt Splice Instructions

Standard Amigo Press Settings

*Follow basic Amigo operating instructions

Pre-heat Temperature	Pre-heat Time	Weld Time
95°C	300 s	50-55 s

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Butt Splice	Recommended
Soft Hinge Lace	Recommended

Alternative Lace Options

Staple Lace	RS62
Plastic Rivet Lace	APF-150

Notes

Aggressive "Crescent" top profile for positive product handling on inclines and declines. Particularly suited to loose material and soft conforming product or packaging.

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	YES	Reinforced	NO
USDA Dairy	YES	Elastic	NO

Standard Fabrications

Cleats	NO	Footless Sidewall	NO
Guide on Top	NO	Footed Sidewall	NO
Guide on Bottom	YES		

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

